CC 75 - condenser clip microphone

UK

This clip microphone offers a 3-pin XLR connection and a windscreen. It's the perfect choice for miking drums and brass.

Caution!

- Never remove the screen holding the capsule, as this may damage the microphone!
- Never drop the mic, as this may cause severe damage!
- When the microphone is not in use, put it in its case. Clean with damp cloth only.

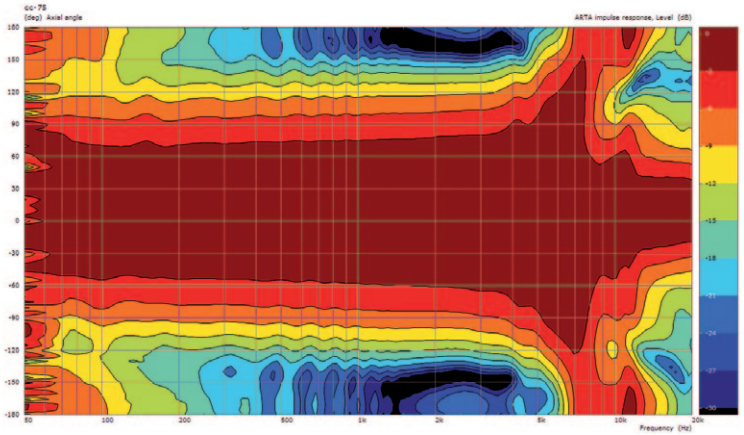

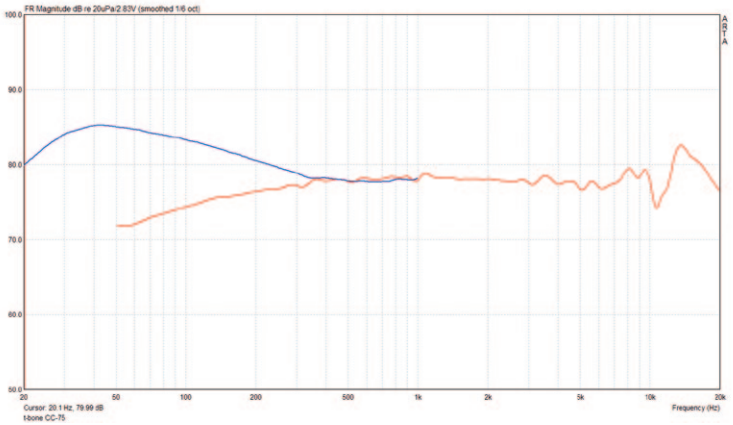

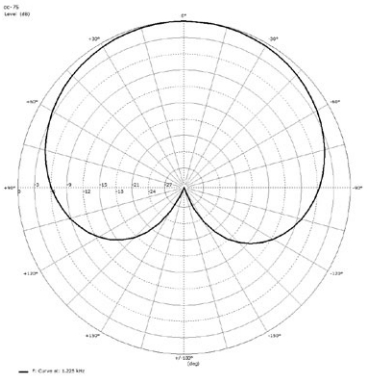

Polar pattern @ 1 kHz

Connection / Supply	XLR / P48
Transducer concept	Condenser
Directivity	cardioid
Field sensitivity [mV/ Pa]	2,4
Field sensitivity [dB re 1V/ Pa]	-52,5
Equivalent noise level [dB(A)]	23,0
Signal-to-noise ratio [dB(A)]	71,0
Maximum SPL [dB SPL @ 1% THD]	97
Electric impedance [ohm @ 1 kHz]	350
Cirrent draw [mA]	1,8
Frequency response 0.1 m -10 dB	20 - 20.000 Hz

Musikhaus Thomann e. K.
Treppendorf 30 • 96138 Burgebrach
Germany • www.thomann.de

the t.bone