





EM 800 - condenser microphone

✓ Includes windscreen

UK

Caution!

- ▶ Never remove the screen holding the capsule, as this may damage the microphone!
- ▶ Never drop the mic, as this may cause severe damage!
- ▶ When the microphone is not in use, take it out of its clamp and put it in its case. Clean with damp cloth only.

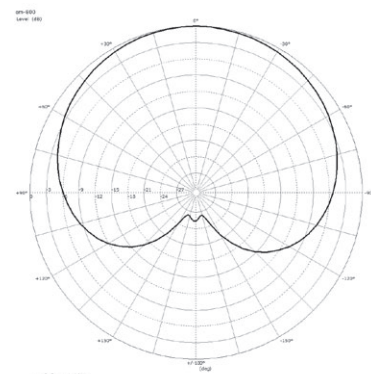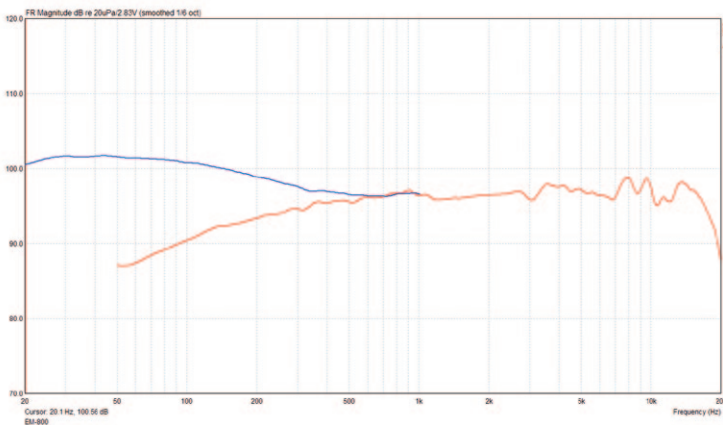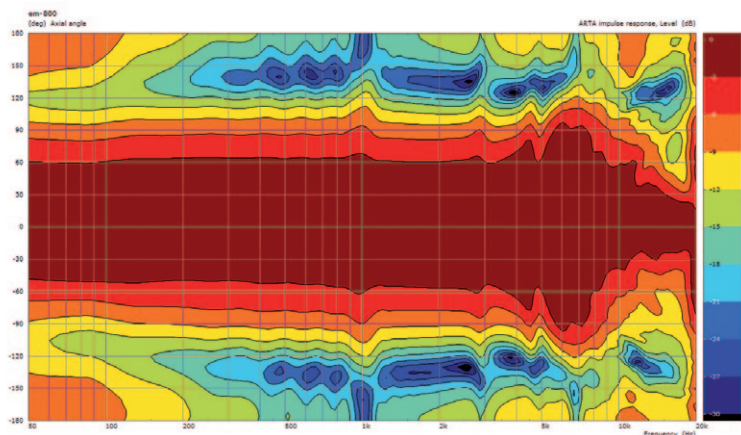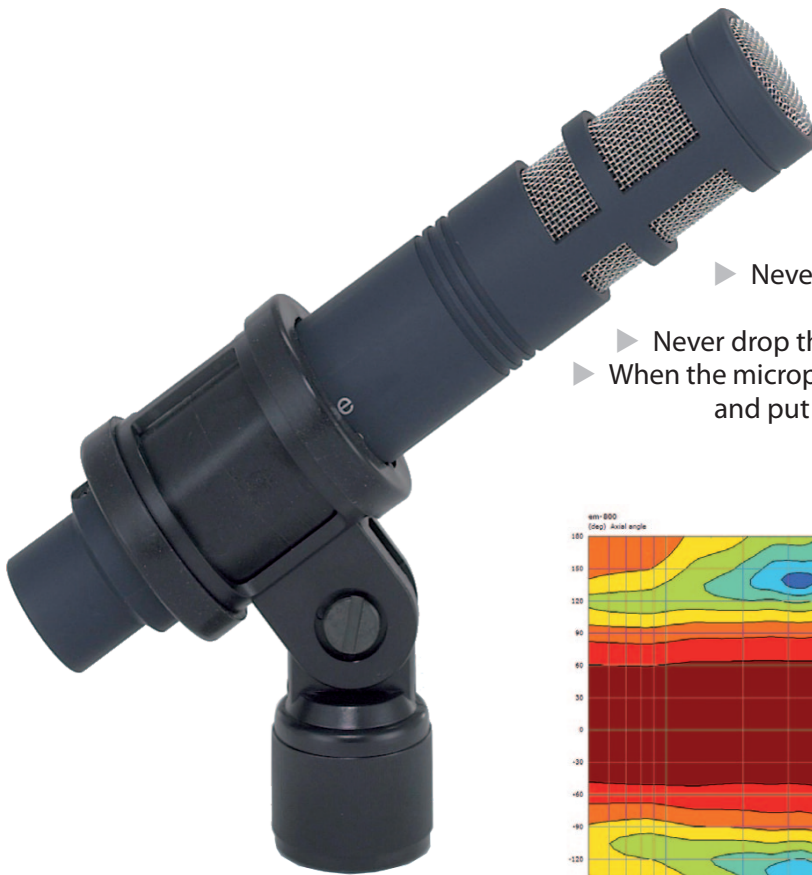

Polar pattern @ 1 kHz

Connection / Supply	XLR / P48
Transducer concept	condenser
Directivity	super-cardioid
Field sensitivity [mV/ Pa]	20.6
Field sensitivity [dB re 1V/ Pa]	-33.7
Equivalent noise level [dB(A)]	14.5
Signal-to-noise ratio [dB(A)]	79.5
Maximum SPL [dB SPL @ 1% THD]	107
Electric impedance [ohm @ 1 kHz]	200
Cirrent draw [mA]	1.8
Frequency response 0.1 m -10 dB	20 - 20.000 Hz

Musikhaus Thomann e. K.
 Treppendorf 30 • 96138 Burgebrach
 Germany • www.thomann.de

